



## FEATURES & SPECIFICATIONS

**INTENDED USE** — The 2VTL4R LED Relight assembly is the ideal solution for renovating existing fluorescent troffer and parabolic systems, delivering improved quality of light and refreshing the space. VTLR volumetric lighting eliminates the “cave effect” by delivering the ideal amount of light to walls, work surfaces, and people. The 2VTL4R Relight assembly is recommended for offices, schools, hospitals, and other general lighting applications where existing 2x4 troffer and parabolic fluorescent fixtures are currently in use.

**CONSTRUCTION** — Universal end brackets are constructed of 20-gauge powder-painted steel and are secured to the host fixture with provided tek screws. End brackets are painted black or white to match existing parabolic or troffer door frame reveals. The LED light engine is 20-gauge powder painted steel and is wired to the supply voltage using a driver-disconnect plug system provided as standard. A steel wiring connection cover is provided for use if required.

The door frame and reflector assembly is vaulted cold-rolled steel with embossed facets and is painted after fabrication. Impact-modified, single clear acrylic diffuser provides excellent shielding and wide distribution.

**OPTICS** — Volumetric illumination is delivered by creating an optimal mix of light to walls, partitions, vertical and horizontal work surfaces — rendering the interior space, objects and occupants in a more balanced, complementary luminous environment. Linear faceted reflector cavity softens and distributes light into the space while minimizing luminous contrast between the fixture and ceiling. Sloped end plates provide a smooth, luminous transition between fixture and ceiling while enhancing the perception of fixture depth.

**ELECTRICAL** — Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 90% LED lumen maintenance at 60,000 hours (L90/60,000).

eldoLED driver options deliver choice of dimming range and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Optional integrated nLight® controls make each luminaire addressable — allowing it to digitally communicate with other nLight-enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Simply connect all the nLight-enabled control devices and the 2VTL4R luminaires using standard Cat-5 cabling. Unique plug-and-play convenience as devices and luminaires automatically discover each other and self-commission.

**Lumen Management:** Unique lumen management system (option N80) provides onboard intelligence that actively manages the LED light source so that constant lumen output is maintained over the system life, preventing the energy waste created by the traditional practice of over-lighting.

Step-level dimming option allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.

Driver disconnect provided where required to comply with US and Canadian codes.

**INSTALLATION** — After existing fluorescent components are removed from housing, universal end brackets are fastened in place with tek screws. The LED light engine assembly mounts to the end brackets and hangs securely while the wiring connection is made using a driver-disconnect plug system provided as standard. The light engine then swings up into position and is secured in place with a captive screw at each end. The doorframe is then inserted via a sliding hinge into the end bracket and secured in the closed position with a rotating cam latch. Light engine may be removed from fixture during service. LED boards include plug-in connectors for easy replacement or servicing. Suitable for damp location installations.

**LISTINGS** — UL/UL classified for use in recessed fluorescent light fixtures. Installation per instructions will not impact existing fixture UL listing. Tested to LM80 standards. DesignLights Consortium® (DLC) qualified

|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

**VT SERIES**  
**RELIGHT**

**Volumetric Troffer**



**2VTL4R**  
**2VTL4RT**

2' x 4' Relight  
LED

eldoLED

*Specifications*

Designed to convert most existing recessed parabolic and lensed troffers.

product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

Protected by one or more of US Patent Nos. 7,229,192; D541,467; D541,468; D544,633; D544,634; D544,992. D544,933 and additional patents pending.

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

Actual performance may differ as a result of end-user environment and application

All values are design or typical values, measured under laboratory conditions at 25 °C.

Note: Specifications subject to change without notice.

**ORDERING INFORMATION**

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** 2VTL4R 40L ADP EZ1 LP835

| Series  | Lumens <sup>1</sup>   | Diffuser                     | Voltage                    | Driver  | Color temperature    | Controls   |
|---------|---|------------------------------|----------------------------|---|----------------------|--|
| 2VTL4R  | 2x4 LED relight assembly, black end brackets for use in parabolic fixture | ADP Acrylic linear prismatic | (blank) MVOLT (120 - 277V) | EZ1 eldoLED, dims to 1%                               | LP835 82 CRI, 3500 K | (blank) No controls  |
|         | 40L 4000  |                              | 347 347V <sup>2</sup>      | EZB Dims to dark                                      | LP840 82 CRI, 4000 K | N80 N-light with 80% lumen management <sup>4</sup>   |
| 2VTL4RT | 2x4 LED relight assembly, white end brackets for use in troffer fixture   |                              |                            | GTH250 Bi-level (2-switch)                            | LP830 82 CRI, 3000 K | N100 N-light with no lumen management <sup>4</sup>   |
| 2VTL4RF | 2x4 LED relight assembly, flange brackets for drywall installation        |                              |                            | EXA1 Dims to 1%, XPoint wireless enabled <sup>3</sup> | LP850 82 CRI, 5000 K | N80EMG N-light with 80% lumen management for use with generator supply EM power <sup>4,5</sup> |
|         |   |                              |                            |   |                      | N100EMG N-light without lumen management for use with generator supply EM power <sup>4,5</sup> |

**Notes**

- 1 Approximate lumen output.
- 2 Option ships separately as a field-installed accessory. Not available with GTH250 driver option. Verify compliance with local codes prior to ordering.
- 3 Gateway not included. Requires on-site commissioning. Visit [www.lightingcontrols.com/XPointWireless](http://www.lightingcontrols.com/XPointWireless) for more information.
- 4 Only available with EZ1 or EZB drivers.
- 5 nLight EMG option requires a connection to existing nLight network Power is provided from a separate N80 or N100 enabled fixture.

# 2VTL4R Volumetric Recessed Lighting 2'x4'


| Energy Comparison - 2x4 LED vs. T12 & T8 |           |                |                          |                          |
|--|-----------|----------------|--------------------------|--------------------------|
| System                                   | Lamp type | Ballast factor | Input watts <sup>1</sup> | Watts saved by using LED |
| 2VTL4R 40L                               | LED       | 1.0            | 38                       | ---                      |
| 4-lamp T12                               | F40T12    | 0.88           | 144                      | 106                      |
| 4-lamp T8                                | F32T8     | 0.88           | 110                      | 72                       |
| 3-lamp T12                               | F40T12    | 0.88           | 108                      | 70                       |
| 3-lamp T8                                | F32T8     | 0.88           | 90                       | 52                       |
| 2-lamp T12                               | F40T12    | 0.88           | 72                       | 34                       |
| 2-lamp T8                                | F32T8     | 0.88           | 60                       | 22                       |

| Performance Data |        |                          |     |
|------------------|--------|--------------------------|-----|
| Lumen Package    | Lumens | Input Watts <sup>1</sup> | LPW |
| 30L LP830        | 3168   | 30.76                    | 103 |
| 30L LP835        | 3326   | 30.75                    | 108 |
| 30L LP840        | 3677   | 30.9                     | 119 |
| 30L LP850        | 3666   | 31.04                    | 118 |
| 40L LP830        | 3992   | 38.98                    | 102 |
| 40L LP835        | 4211   | 39.2                     | 107 |
| 40L LP840        | 4315   | 39.3                     | 110 |
| 40L LP850        | 4623   | 39.39                    | 117 |
| 48L LP830        | 4619   | 46.43                    | 99  |
| 48L LP835        | 4879   | 46.64                    | 105 |
| 48L LP840        | 4993   | 46.81                    | 107 |
| 48L LP850        | 5354   | 46.87                    | 114 |
| 60L LP830        | 5069   | 52.15                    | 97  |
| 60L LP835        | 5351   | 52.42                    | 102 |
| 60L LP840        | 5500   | 52.55                    | 105 |
| 60L LP850        | 5868   | 52.71                    | 111 |

## FIT COMPATIBILITY

The 2VTL4R Relight assembly was engineered to upgrade recessed 2X4 fixtures, including most parabolic and lensed troffers from all major manufacturers.

Dimensional requirements are below but Lithonia Lighting recommends a trial installation prior to purchasing project quantities.

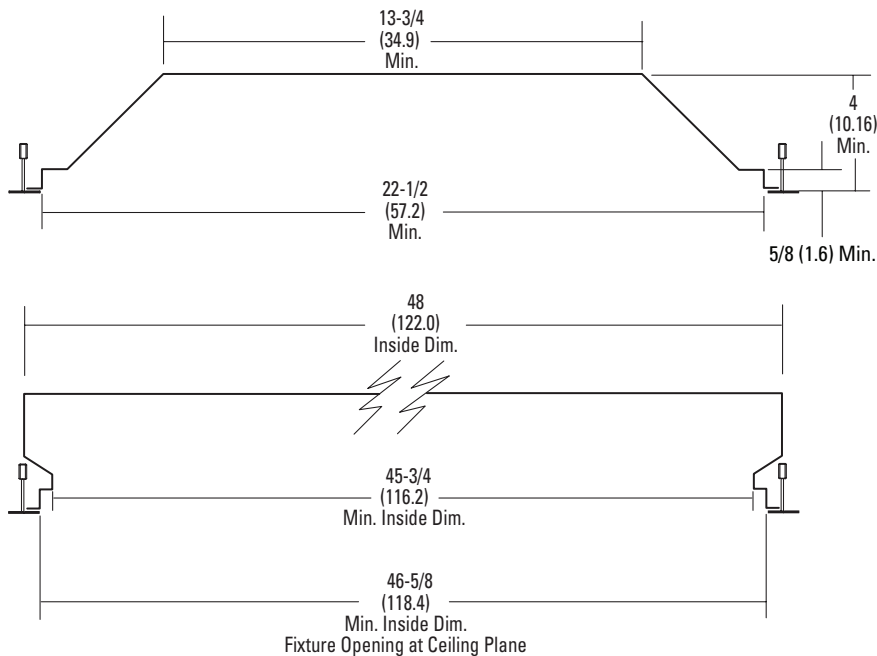

Relight assemblies are designed to fit most recessed fixtures mounted in T-grid installations. For surface mounted fixtures or for fixtures mounted in ceiling types other than T-grids, consult factory before ordering.

Dimensions are inches (centimeters) unless otherwise noted.


2VTL4R-2X4



# 2VTL4R Volumetric Recessed Lighting 2'x4'

## PHOTOMETRICS

2VTL4R 40L EZ1 LP835, 4125.9 delivered lumens, test no. LTL25401P, tested in accordance to IESNA LM-79

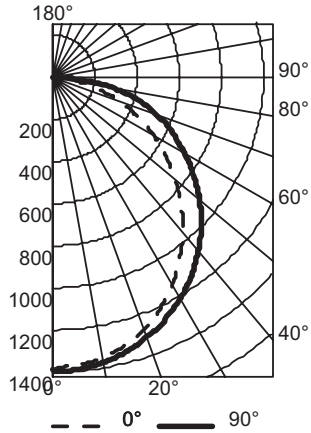

| CP Summary |      |      | Coefficients of Utilization |     |     |     |     |     |     |     |     | Zonal Lumen Summary |            |        |        |           |
|------------|------|------|-----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|---------------------|------------|--------|--------|-----------|
|            | 0°   | 90   | pf                          | 80% |     |     | 70% |     |     | 50% |     |                     | Zone       | Lumens | % Lamp | % Fixture |
|            |      |      | pc                          | 70% | 50% | 30% | 50% | 30% | 10% | 50% | 30% | 10%                 |            |        |        |           |
| 0°         | 1389 | 1389 | 0                           | 119 | 119 | 119 | 116 | 116 | 116 | 111 | 111 | 111                 | 0° - 30°   | 1077   | 26.1   | 26.1      |
| 5°         | 1370 | 1391 | 1                           | 108 | 103 | 98  | 101 | 97  | 93  | 96  | 93  | 90                  | 0° - 40°   | 1762   | 42.7   | 42.7      |
| 15°        | 1318 | 1348 | 2                           | 98  | 89  | 82  | 87  | 81  | 75  | 84  | 78  | 73                  | 0° - 60°   | 3136   | 76.0   | 76.0      |
| 25°        | 1208 | 1266 | 3                           | 89  | 78  | 70  | 76  | 69  | 62  | 73  | 67  | 61                  | 0° - 90°   | 4125   | 100.0  | 100.0     |
| 35°        | 1051 | 1148 | 4                           | 81  | 69  | 60  | 68  | 59  | 53  | 65  | 58  | 52                  | 90° - 120° | 0      | 0.0    | 0.0       |
| 45°        | 862  | 995  | 5                           | 75  | 62  | 52  | 60  | 52  | 45  | 58  | 51  | 45                  | 90° - 130° | 0      | 0.0    | 0.0       |
| 55°        | 658  | 818  | 6                           | 69  | 55  | 46  | 54  | 46  | 39  | 53  | 45  | 39                  | 90° - 150° | 0      | 0.0    | 0.0       |
| 65°        | 445  | 629  | 7                           | 64  | 50  | 41  | 49  | 41  | 35  | 48  | 40  | 34                  | 90° - 180° | 0      | 0.0    | 0.0       |
| 75°        | 236  | 418  | 8                           | 59  | 46  | 37  | 45  | 37  | 31  | 44  | 36  | 31                  | 0° - 180°  | 4126   | 100.0  | 100.0     |
| 85°        | 55   | 119  | 9                           | 56  | 42  | 34  | 41  | 33  | 28  | 40  | 33  | 28                  |            |        |        |           |
| 90         | 3    | 1    | 10                          | 52  | 39  | 31  | 38  | 30  | 25  | 37  | 30  | 25                  |            |        |        |           |

2VTL4R-2X4

